

A

B

C

D

E

F

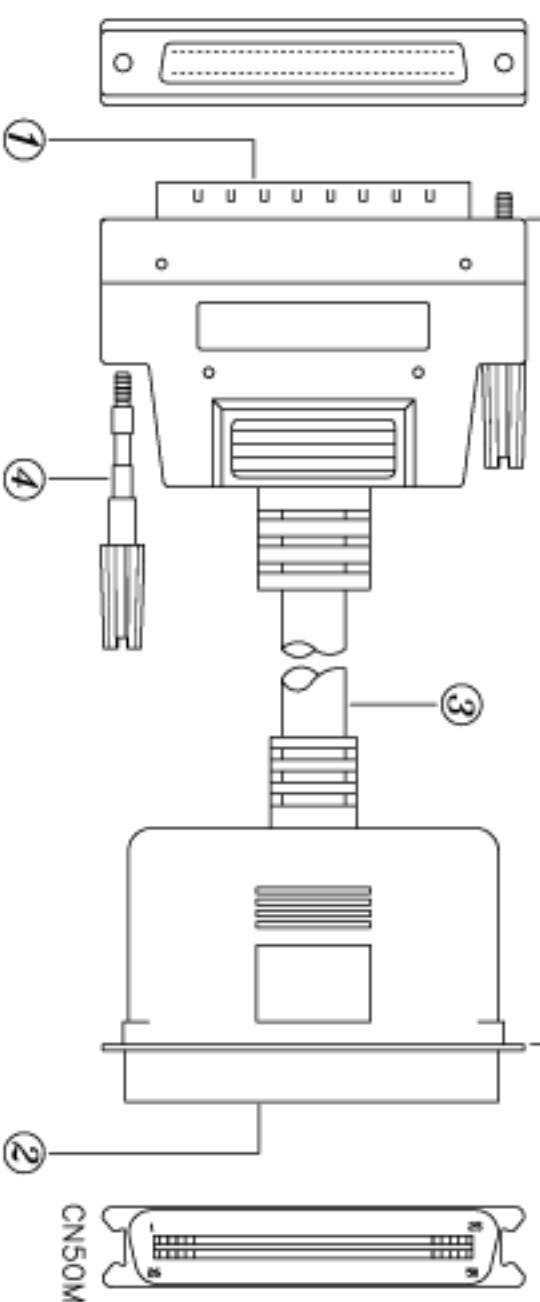
DATE BY

REVISION



HPDB68M

3FT±1inches

CONFIGURATION:
HPDB68M

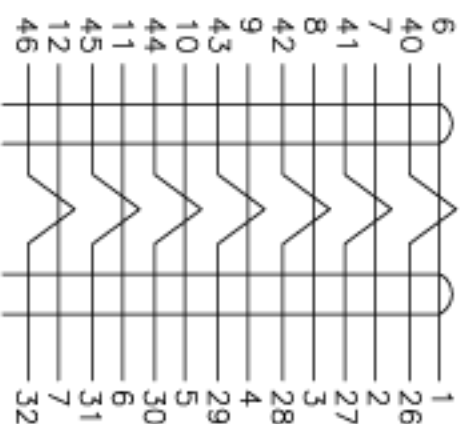
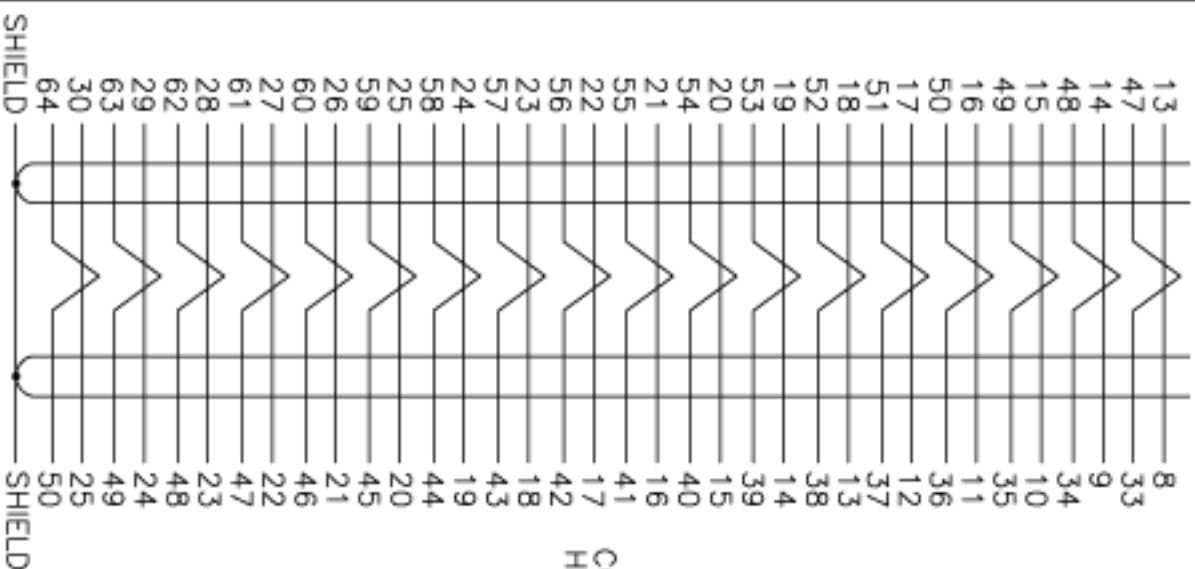
CN50M

MAT'L:

- 1.CABLE:#28,UL2919,25P+1+AL/MY+B.O.D:9.5(I.D:0.75mm)
- 2.CONNECTOR:HPDB68M,PIN
CN50M,BLACK
- 3.THUMBSCREW:#2-56UNC
- 4.COPPER TAPE:(10*135)+(35*110)
42*140

NOTE:

- 1.TOTAL LENGTH:3FT±1inches
CABLE CUT:3FT+5CM
- 2.COLOR:BEIGE
- 3.MOLDED TYPE
- 4.ROHS COMPLIANT

ROHS
Compliant


SHIELD



DATE	20 FEB,2002	PARTS NO	SC3311M
UNIT	MM	DRAWN NO	001763
SCALE		BUYER NO	002

TITLE:

HPDB68 MALE-CN50 MALE
(MOLDED TYPE)

AK-Y1302

NO.	DESCRIPTION	QTY
④	THUMBSCREW:#2-56UNC	2
③	#28,UL2919,25P+B.O.D:9.5,BEIGE	3FT
②	CN50M,BLACK	1
①	HPDB68M	1

DRAWN	Y.C.C	CHECK	APPRO
2/20			

ASSMANN ELECTRONICS,INC.